


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		AS DRAWN BY CANAM.	9/11/2012	JAG	
2		CH'D .018 DIM LIMITS WAS +.003/- .000 IS +.002/- .000. ADDED LIMITS TO .175DIM(+/- .0015). CH'D DIM SCHEME TO MEASURE DIST. BETWEEN GROVES WAS .506 +.001/- .000 IS .470+.005/- .000.	2/6/2013	BIM	SE
2A	14-0127	CH'D TITLE BLOCK WAS RED BARN IS DART. ADDED BAG & LABEL NOTE. DELETED DIM 2X .078. ADDED DIM .06. CH'D TOLERANCE ON NON-CRITICAL DIMENSIONS.	8/13/2014	DPD	RW

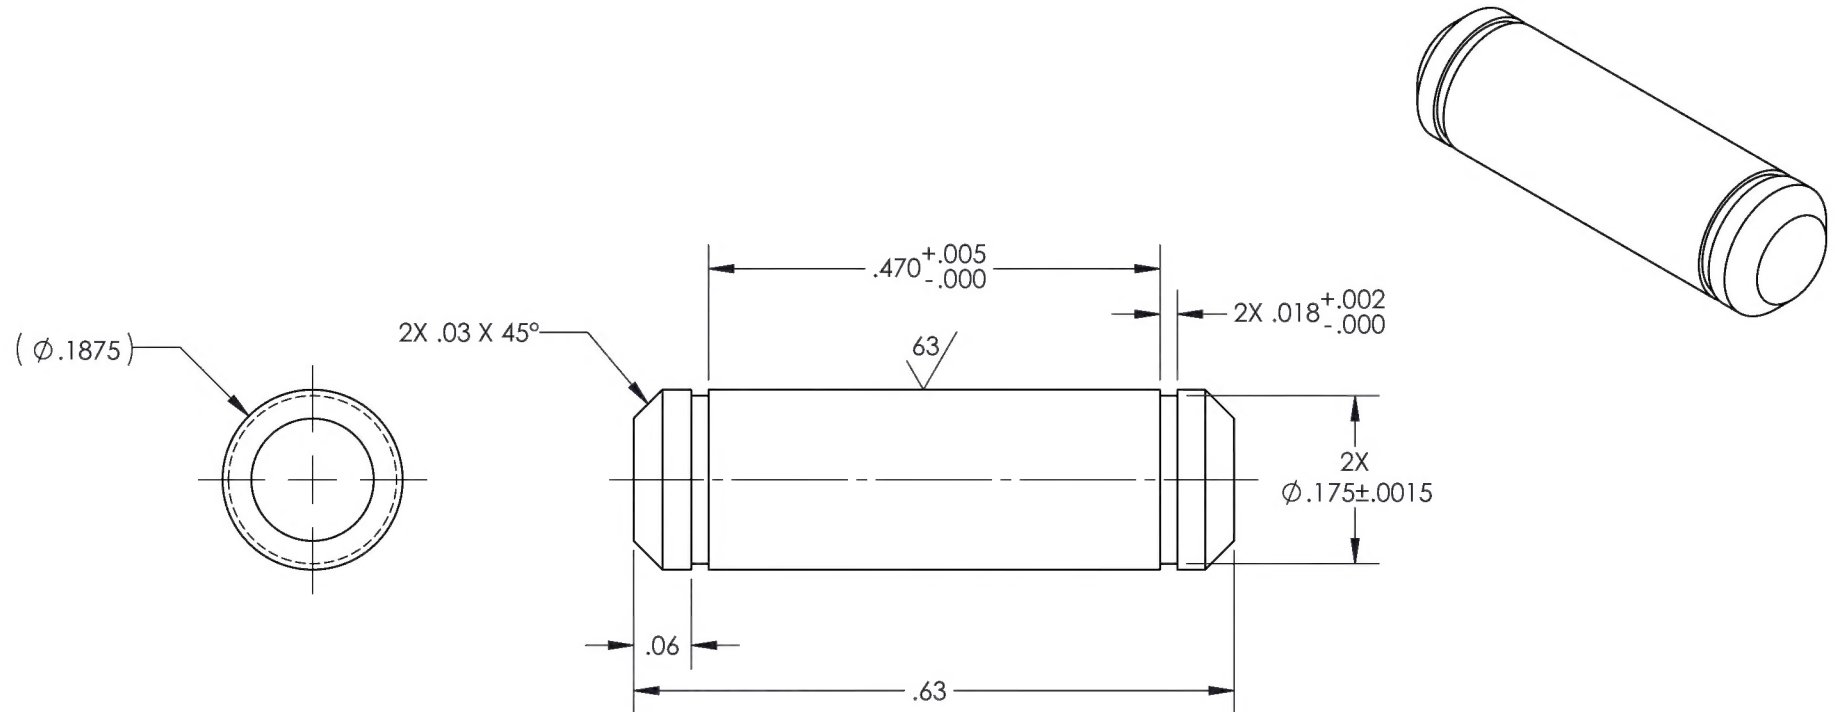

NOTE:
BAG & LABEL WITH BATCH NUMBER.

DART AEROSPACE	
TITLE LINK PIN	
DWG NO. C45-3-4	REV 2A
MAT'L 0-1 DRILL ROD	DRAWN BY: CANAM
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	APPROVED <i>D Weil</i>
.XXX ± .005	HEAT TREAT HRC 53-56
.XX ± .01	FINISH NICKEL PLATE
.X ± .1	SPEC .0004 - .0006 THICK
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	USED ON MODEL
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
SCALE 5:1	DATE 8/15/1997
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
			C45-3-4	1	LINK PIN	0-1 DRILL ROD	Ø3/16 X 3/4